

MARION COUNTY SURVEYOR'S OFFICE


SECTION CORNER RECORD

DEBRA S. JENKINS
MARION COUNTY SURVEYOR

SEC. 24 TWN. 15_N RNG. 4_E

BRYAN F. CATLIN, PLS
TECHNICAL SUPERVISOR

Date: 6-19-09
Party Chief: Wilcoxen
Crew: Finney
Type of Marker: Cut 'x'
Method of Establishment: County: 7-14-1995
IN S.P.C. E Zone, NAD 83
Name: 15042405
N: 497 850.992 2(m)
E: 68 401.789 2(m)

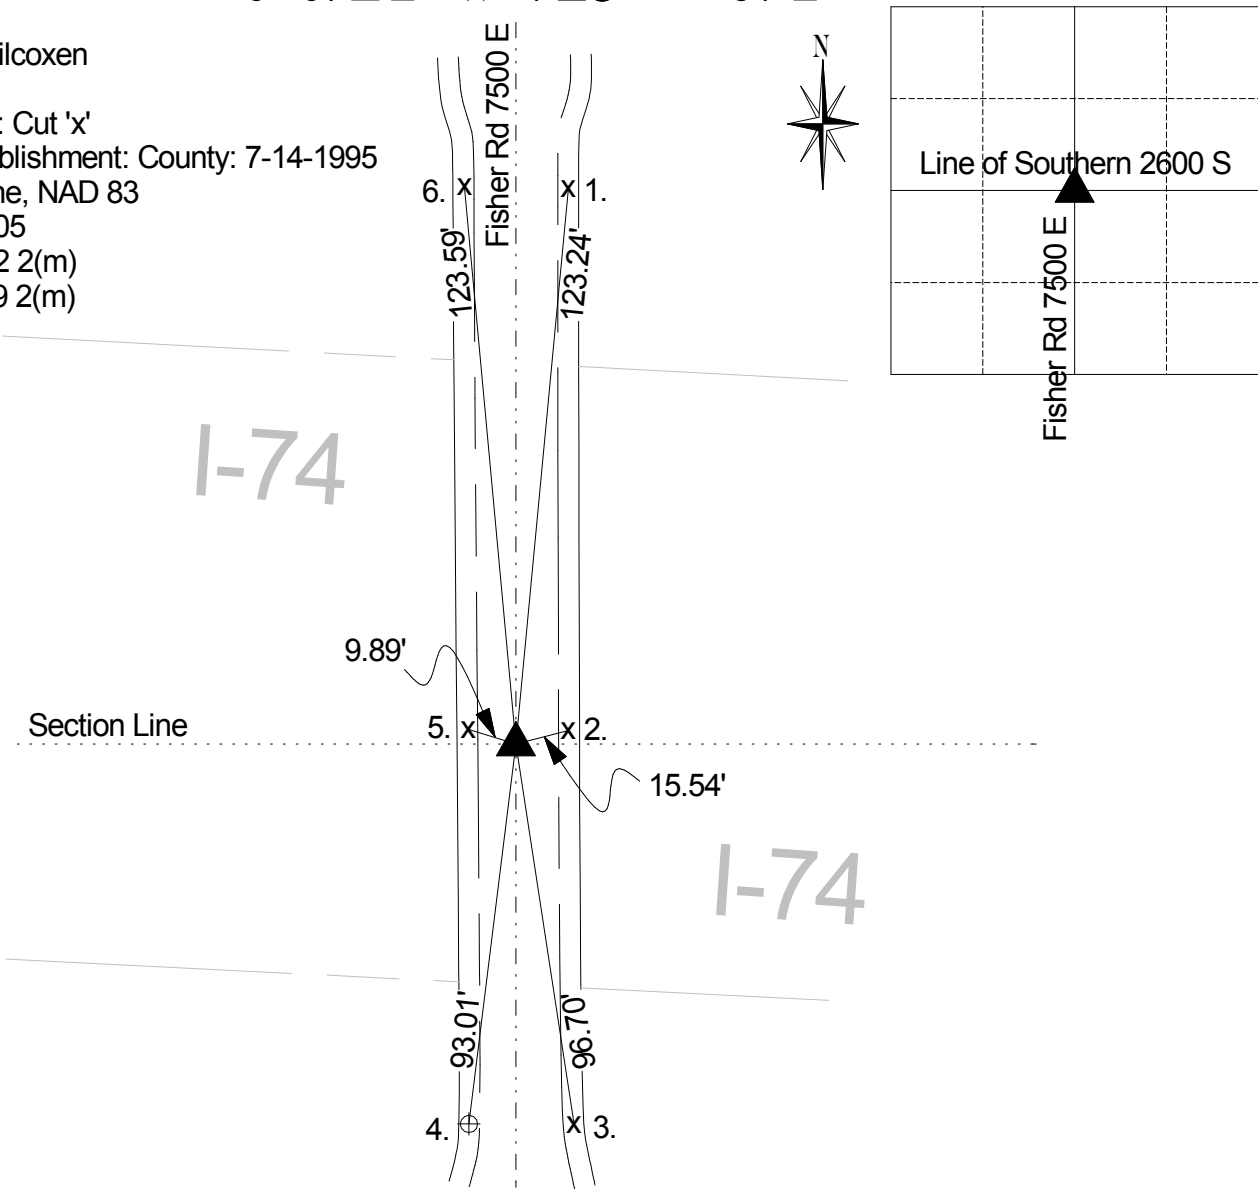

A survey by D.B. Hasbrook in March of 1851 indicates no stone but the following witnesses: 8" beech bearing N 18¼ E 25 links and a 24" white oak bearing N 74 W 102 links (Warren Township Legal Book p. 26). 10/17/1949 Walton called a found stone 5" down. 3/3/53 Monroe called a stone. 5/13/54 Monroe called a stone. 7/20/55 Burres called a stone. 4/6/59 Monroe called a stone. 6/5/61 Monroe called a set brass bolt with washer. 9/14/79 Bruer called a cut x. 8/28/81 Bruer called a brass bolt (title corner) as per ties dated 10/16/75. Record corner (no point set) was computed in August of 1981 on traverse of 24-15-4 completed in September of 1979 per County Surveyor's records. 7/23/87 Gries called a PK nail . 11/18/88 Gries called a brass bolt (title corner). 7/14/1995 Kiste called a cut x in concrete. 6/5/2004 Wilcoxen called a cut x in center of bridge. 6/19/09 Wilcoxen called a cut x in center of bridge.

REF.	DISTANCE	DESCRIPTION
1.	123.24'	Cut 'x' in concrete walk of bridge
2.	15.54'	Cut 'x' in concrete walk of bridge
3.	96.70'	Cut 'x' in concrete walk of bridge
4.	93.01'	State Highway BM-G-60 (Brass Disc in sidewalk)
5.	9.89'	Cut 'x' in concrete walk of bridge
6.	123.59'	Cut 'x' in concrete walk of bridge

Note: The record corner shown here corrects an error in the location of 'said' record corner on 9-14-1979 ties. There is a cut 'x' lying 1.44' N of the record corner.

THIS CORNER POSITION
REPRESENTS A "TITLE" CORNER
AND MAY NOT NECESSARILY
REPRESENT THE POSITION BASED
ON RECORD CORNERS.